


For V.35 access

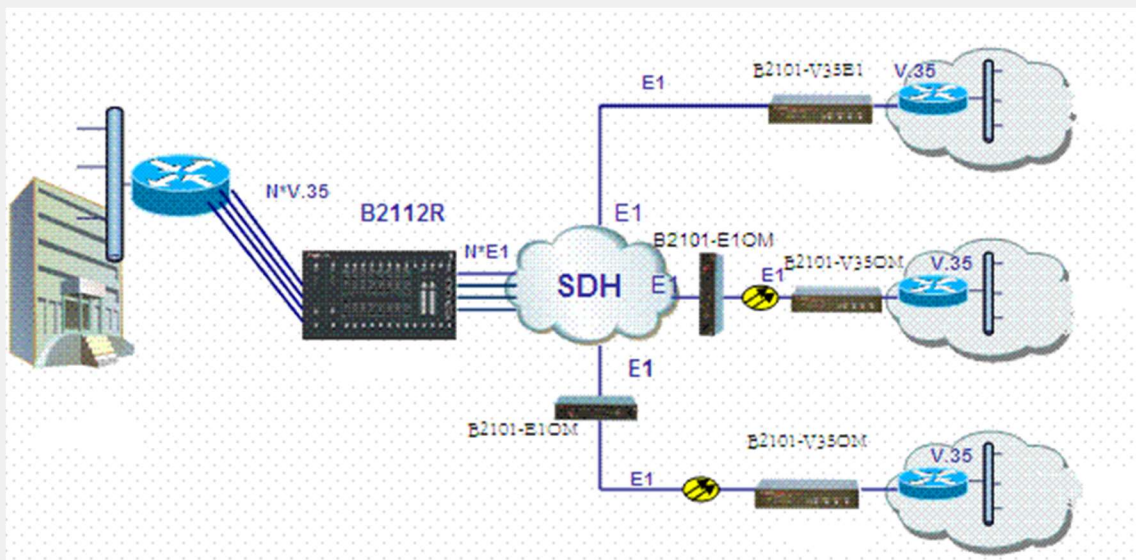

In customer premise, B2101-V35E1 or B2101-V35OM can be deployed. In the latter case, B2101-E1OM can be used for branch office access.

In the central server room, B2112R is deployed, featuring with V.35 converter line card LC-B2112R-2V35E1, revert to V.35 signal from E1 signal, then connect to router to realize interconnection between headquarter and branch offices.